



A	PRESS CABLE SREW
B	LAMELLAE PRESS-CABLE SEAL
C	GASKET PRESS-CABLE SEAL
D	HOUSING BLACK
E	SOLDERED CONTACT GOLD PLATED
F	O-RING
G	INTERNAL CORE M8
H	PLASTIC NUT FOR HOUSING
I	M8 BRASS+NIKKEL PLATED
J	COPPER DUCT

CONNECTOR FEATURES	
PRODUCT TYPE	M8 FIELD ATTACHABLE
CONTACT TYPE	MALEITO SOLDER WIRES!
NUMBER OF CONTACTS	3POLES
HOUSING MATERIAL/COLOUR	PA66/BLACK
HOUSING TYPE	180°
COUPLING NUT MATERIAL	BRASS+NIKKEL PLATED
O-RING	NBR
EXIT CABLE	PG7
CABLE SUITABLE	FROM ø3,5mm TO ø5mm
CONDUCTOR SIZE	FROM 0,08mm <sup>2</sup> TO 0,34mm <sup>2</sup>
RATED VOLTAGE	50V AC / 60V DC
RATED CURRENT	3A
PROTECTION CLASS	IP65
TEMPERATURE RANGE	FROM -40°C TO +90°C
CONNECTOR WITH H.T.P.LOGO	

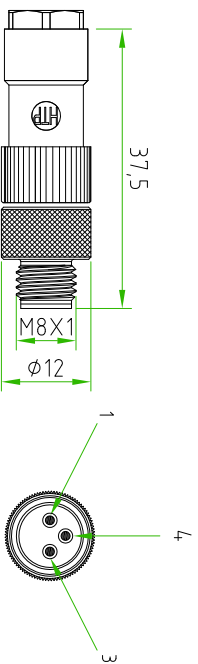

TOLLERANZE		DISIGNAZIONE		DATA		SCALA		DESIGNO N.	
UDM	±0,2	ANGOLO	LORENZO CHINNO	02.01.17	1:1				
		CONTROLLATO						MATERIALE	
DESCRIZIONE									
M8 MALE STRAIGHT 180° 3 POLES BLACK HOUSING FIELD									
ATTACHABLE WITH SOLDERED CONTACTS.									
CONNECTOR WITH H.T.P.LOGO									
		H.T.P.		H.T.P.		08MC3000			
		HIGH TECH PRODUCTS							