
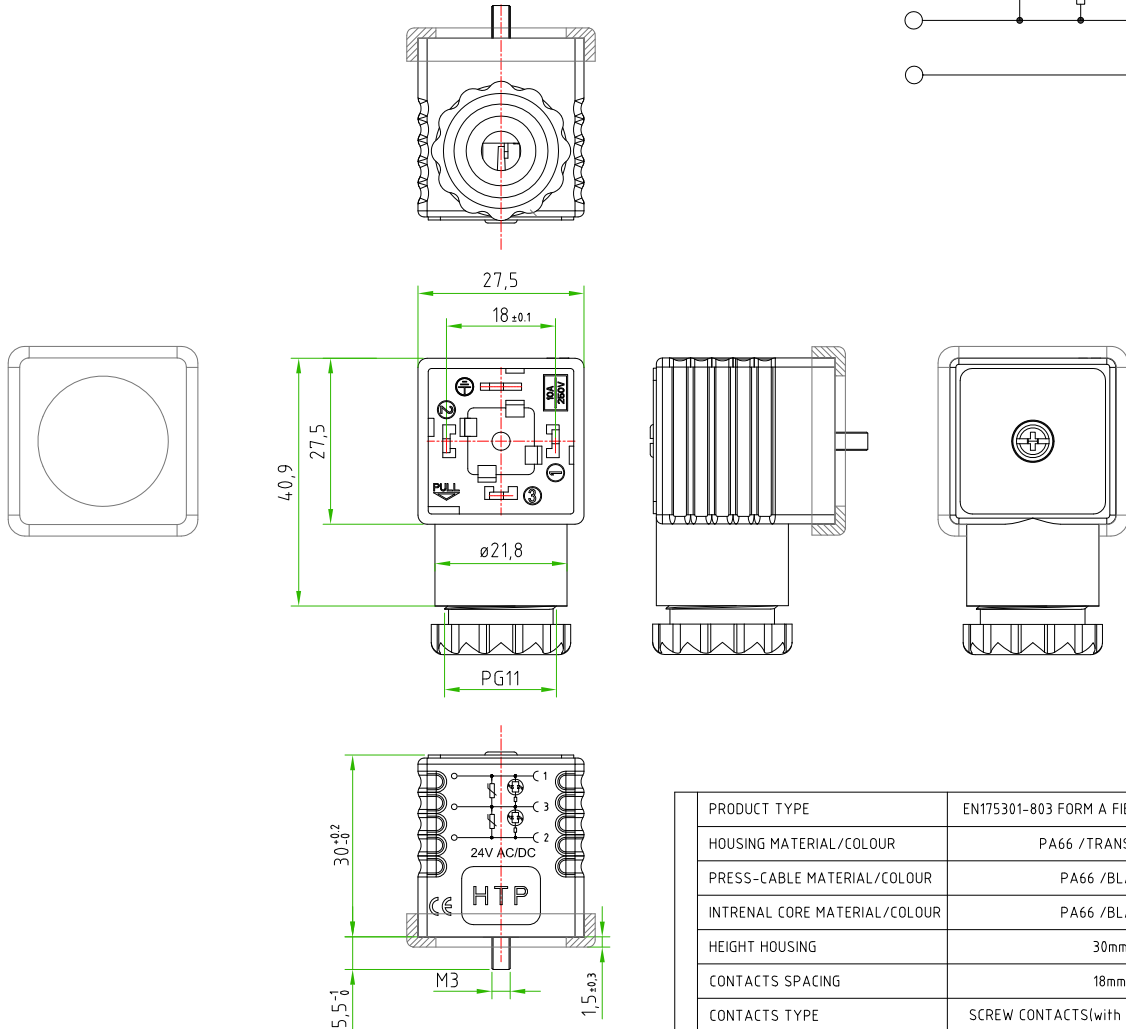


Rev.	Modify	Date	Firma	Approved

Rev.	Modify	Date	Firma	Approved

Rev.	Modify	Date	Signed	Approved

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	



CONNECTOR FEATURES	PRODUCT TYPE	EN175301-803 FORM A FIELD ATTACHABLE.
	HOUSING MATERIAL/COLOUR	PA66 /TRANSPARENT
	PRESS-CABLE MATERIAL/COLOUR	PA66 /BLACK
	INTRENAL CORE MATERIAL/COLOUR	PA66 /BLACK
	HEIGHT HOUSING	30mm
	CONTACTS SPACING	18mm
	CONTACTS TYPE	SCREW CONTACTS(with protection plate)
	NUMBER OF POLES	3POLES+EARTH
	EARTH POSITIONING	H.12
	CABLE EXIT	PG9/11 UNIFIED
	SUITABLE CABLE	FROM ø6mm TO ø10mm
	MAX.CONDUCTOR SIZE	1,5mm <sup>2</sup>
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	N.2 BIPOLAR LED(1-3: GREEN ; 2-3:YELLOW)+ N.2 VARISTORS
	RATED VOLTAGE	24V AC/DC
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C	
GASKET TYPE	PROFILED NBR	
FIXING SCREW	M3X0,5 L=32,5mm	
CONNECTOR WITH H.T.P. LOGO		

Designer	CIMMINO L.	Date	2018-09-05	Tolerance	±0,2	Units:	mm	Series	EN175301-803 (form A)	Drawing n.	1/1
Approved	SUGLIANI R.	Date	2018-09-05	Scale	1:1	Size:	A4	Customer code:			

**DESCRIPTION**  
 SQUARE CONNECTOR EN175301-803 FORM A, FIELD ATTACHABLE, 3P. +PE, WITH N.2 BIPOLAR RED LEDS (GREEN AND YELLOW)+n.2 VARISTORS, 24V AC/DC, TRANSPARENT HOUSING, PG9/11 unified. CONNECTOR WITH H.T.P. LOGO.

**H.T.P.PART NUMBER**

G1TU32VL1

A4

