


ELECTRICAL SCHEME:

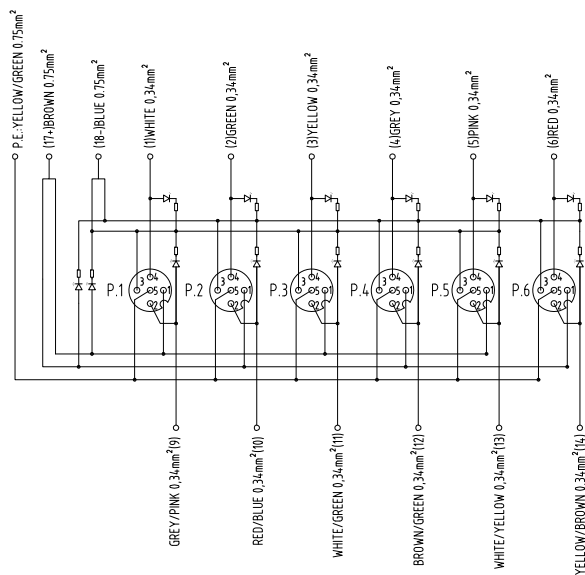

PLEASE USE THE CABLE 3X0,75mm²+16X0,34mm².
PLEASE NOT CONNECTED THIS WIRES: BLACK 0,34mm²/PURPLE 0,34mm²/WHITE-GREY 0,34mm²/GREY-BROWN 0,34mm²
WHITE-GREY 0,34mm²/GREY-BROWN 0,34mm²

DISTRIBUTION BOX FEATURES	
DISTRIBUTION BOX TYPE	6POSITION MOULDED CABLE
DISTRIBUTION BOX COLOUR	BLACK
CONTACT TYPE	FEMALE
NUMBER OF CONTACTS	5POLES
CIRCUIT TYPE	PNP
DISTRIBUTION BOX DOUBLE SIGNAL	
DISTRIBUTION BOX WITH H.T.P. LOGO	
DISTRIBUTION BOX WITH LED	
CABLE FEATURES	
H.T.P. CABLE CODE	CAVO P-3+16-K6-IS
NUMBER OF CONDUCTORS	n°3X0,75mm ² +n°16X0,34mm ²
CONDUCTOR SECTION	0,75mm ² /0,34mm ²
CABLE MATERIAL	PUR ULstyle21576
COATING COLOUR	BLACK
CONDUCTOR ISULATION MATERIAL	TPO
CABLE LENGTH	10000mm
HIGH FLEX CABLE	
THIS CABLE IS PROVIDED BY H.T.P.	

TOLLERANZE	±0,3	DISEGNATORE LORENZO CIMMINO	DATA	01.12.09	SCALA	1:2	DISEGNO N.	
U&M	ANGLO	CONTROLLATO						
DESCRIZIONE DISTRIBUTION BOX, BLACK, WITH H.T.P. LOGO, 6POSITIONS POLES, PNP CIRCUIT, DOUBLE SIGNAL, WITH MOULDED CABLE PUR/PVC, BLACK, HIGH FLEX, 3X0,75mm ² +16X0,34mm ² , L=10m			TIPO DISTRIBUTION BOX		MATERIALE			
			CODICE		J12C6B5P10-IS			