

Rev.	Modify	Date	Firma	Approved
01	-	2017-02-17	SUGLIANI	CIMMINO







Rev.	Modify	Date	Firma	Approved

Rev.	Modify	Date	Signed	Approved
01	-	2017-02-17	SUGLIANI	CIMMINO


CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	SUGLIANI R.	Date	2016-08-05	Tolerance	±0,2	Units:	mm	Series	INDUSTRIAL STANDARD (form B)	Drawing n. 1/1
Approved	CIMMINO L.	Date	2016-08-05	Scale	1:1	Size:	A4	Customer code:		

	<b>DESCRIPTION</b> RECTANGULAR CONNECTOR INDUSTRIAL STANDARD FORM B, FIELD ATTACHABLE, 2P.+PE, WITH RED LED+DIODE (1A), 115V DC, TRANSPARENT HOUSING, PG9 unified. CONNECTOR WITH H.T.P. LOGO.	<b>H.T.P.PART NUMBER</b>  M1TS2DL2

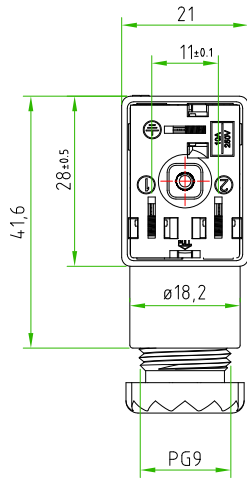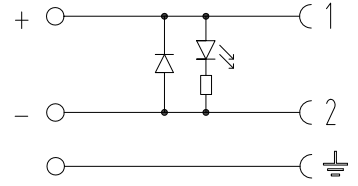

REV.01



CONNECTOR FEATURES	PRODUCT TYPE	INDUSTRIAL STANDARD FORM B FIELD ATTACHABLE.
	HOUSING MATERIAL / COLOUR	PA66 / TRANSPARENT
	PRESS-CABLE MATERIAL / COLOUR	PA66 / BLACK
	INTRINSEC CORE MATERIAL / COLOUR	PA66 / BLACK
	HEIGHT HOUSING	30mm
	CONTACTS SPACING	11mm
	CONTACTS TYPE	SCREW CONTACTS (with protection plate)
	NUMBER OF POLES	2POLES+EARTH
	EARTH POSITIONING	H.12 (TURNABLE)
	CABLE EXIT	PG9 UNIFIED
	SUITABLE CABLE	FROM ø4mm TO ø8mm
	MAX.CONDUCTOR SIZE	1,5mm <sup>2</sup>
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	RED LED+DIODE(1A)
	RATED VOLTAGE	115V DC
	CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
	GASKET TYPE	PROFILED NBR
	FIXING SCREW	M3X0,5 L=32,5mm
CONNECTOR WITH H.T.P. LOGO		

A4

