


Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved
Rev.	Modify	Date	Signed	Approved


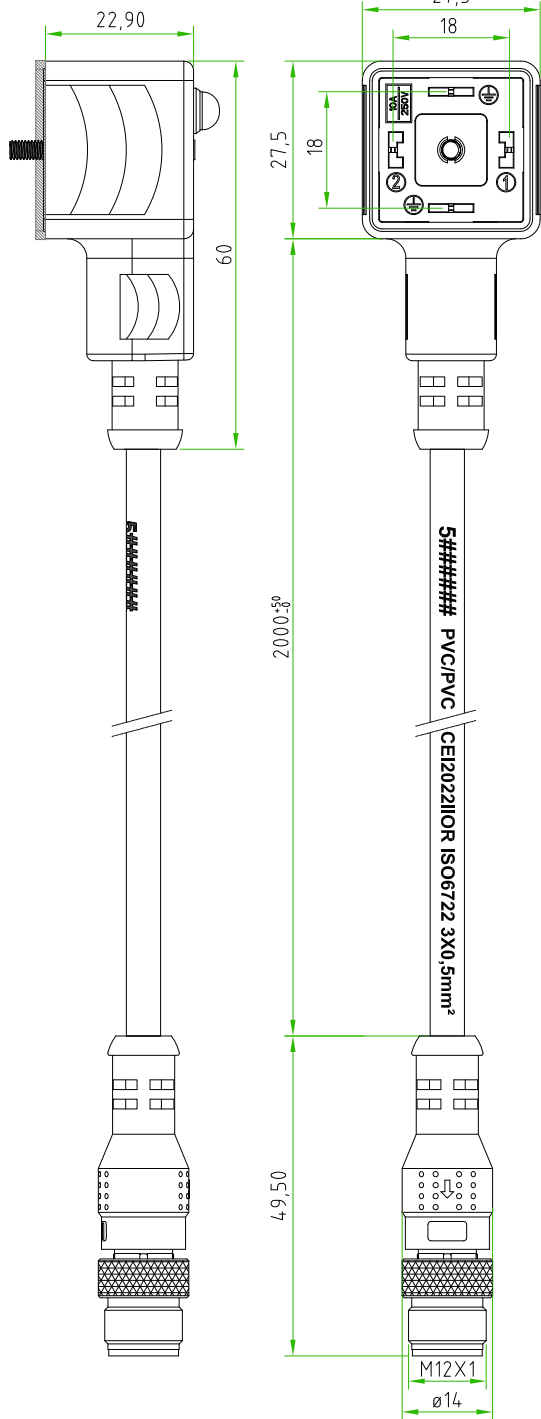


PRODUCT TYPE		EXTENSION M12 CIRCULAR CONNECTORS+SQUARE CONNECTOR EN175301-803(type-A) WITH MOULDED CABLE	
CONNECTOR FEATURES	M12	M12 CONNECTOR TYPE	STRAIGHT 180°MALE 3POLES
	EN175301-803	NUMBER OF CONTACTS CONNECTED	N°3
		PROTECTION CLASS	IP69K
		EN175301-803 CONNECTOR TYPE	TYPE A
		CONNECTOR COLOUR	BLACK
		CONTACTS SPACING	18mm
		NUMBER OF CONTACTS	2POLES+2EARTHS
		EARTH POSITIONING	H.6-12
CENTRAL FIXING SCREW		M3X0,5 L=25mm	
CABLE FEATURES	CONNECTORS WITHOUT H.T.P.LOGO		
	H.T.P.CABLE CODE	CAVO 04	
	NUMBER OF CONDUCTORS	N°3	
	CONDUCTORS SECTION	0,5mm ²	
	CABLE MATERIAL	PVC CEI2022IIOR	
	COATING COLOUR	GREY RAL7032	
	CONDUCTORS INSULATION MATERIAL	PVC	
	CABLE LENGHT	2000mm	
	ON THE CABLE,NEAR THE CONNECTOR HEAD,MUST BE SILK PRINTED THE H.T.P. PRODUCTION DATE CODE 5#####		
	ON THE CABLE NOT APPLIED THE HOLDERS FOR CABLE MARKING. ON THE CABLE MUST BE SILK PRINTED: PVC/PVC CEI2022IIOR ISO6722 3X0,5mm ² .		

CUSTOMER APPROVAL

SIGNATURE	DATE

PLEASE SIGN AND RETURN

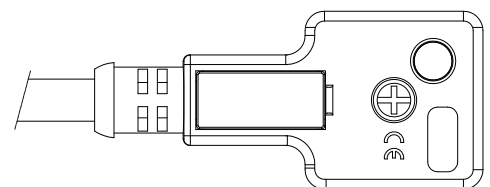

Designer	CIMMINO L.	Date	2015-07-02	Tolerance	±0.3	Units:	mm	Series	EN175301-803+M12	Drawing n. 1-1
Approved	MAZZOLA M.	Date	2015-07-02	Scale	TO FIT	Size:	A4	Customer code:		

	DESCRIPTION	H.T.P.PART NUMBER
	EXTENSION WITH SQUARE CONNECTOR EN175301-803(type-A),2P.+P.E., BLACK,WITH YELLOW LED+VARISTOR,24V,+ M12 CIRCULAR MALE CONNECTOR, STRAIGHT 180°,3POLES,WITH CABLE PVC/PVC CEI2022IIOR,3x0,5mm ² , GREY COLOUR,L=2m.CONNECTORS WITHOUT H.T.P.LOGO	CG1N02VG1C042-12MD3